

Repair manual

Separate the top case and bottom case

Step 1: remove the GPS and the rubber plug


Tool: cross screwdriver



Remove the rubber plug before removing the GPS

Step 2: remove the screws

Tool: cross screwdriver #2

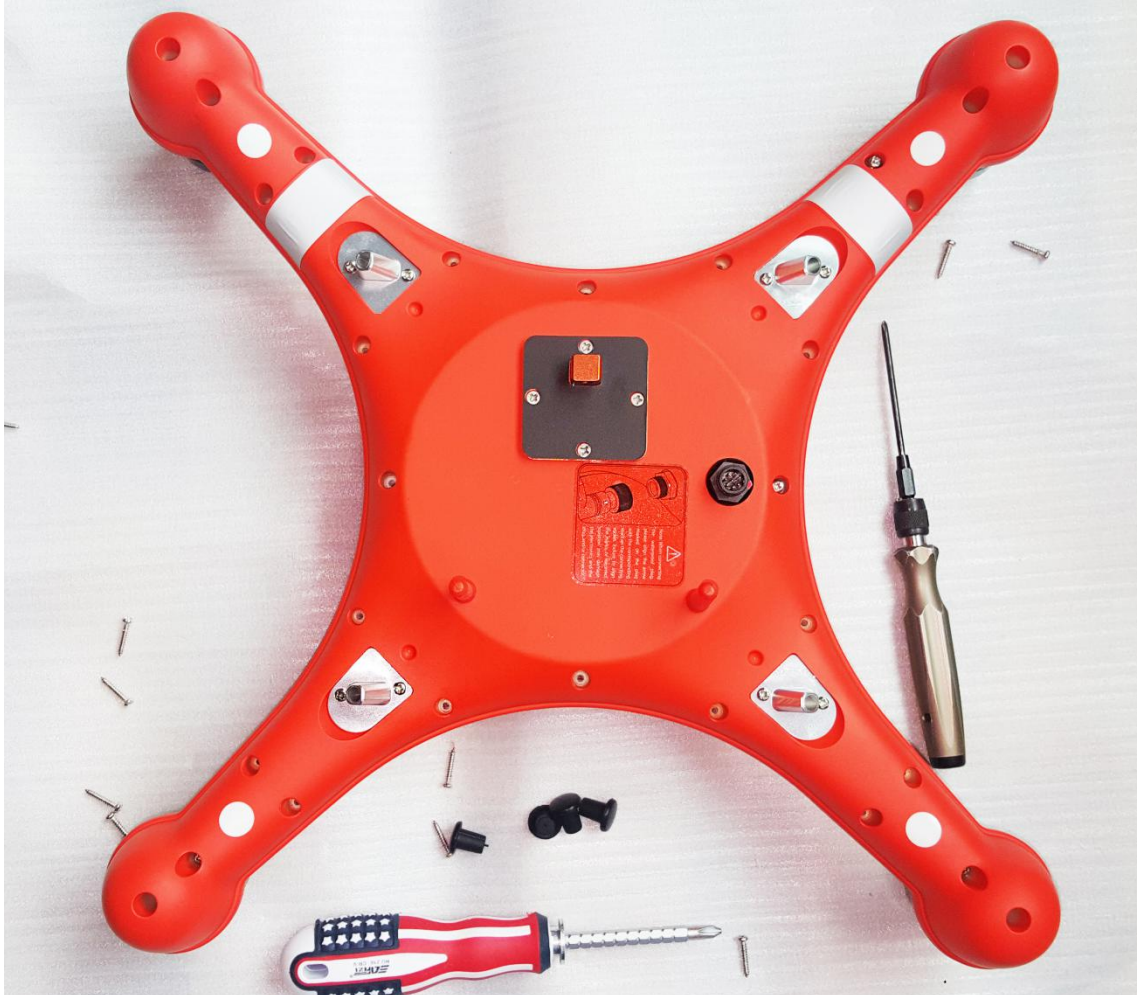


Use the cross screwdriver #2 to remove all the screws on the bottom case, also you can use the electric

Step 3: separate the up case and bottom case





Step 4: disconnect the motor and the electronic speed controller

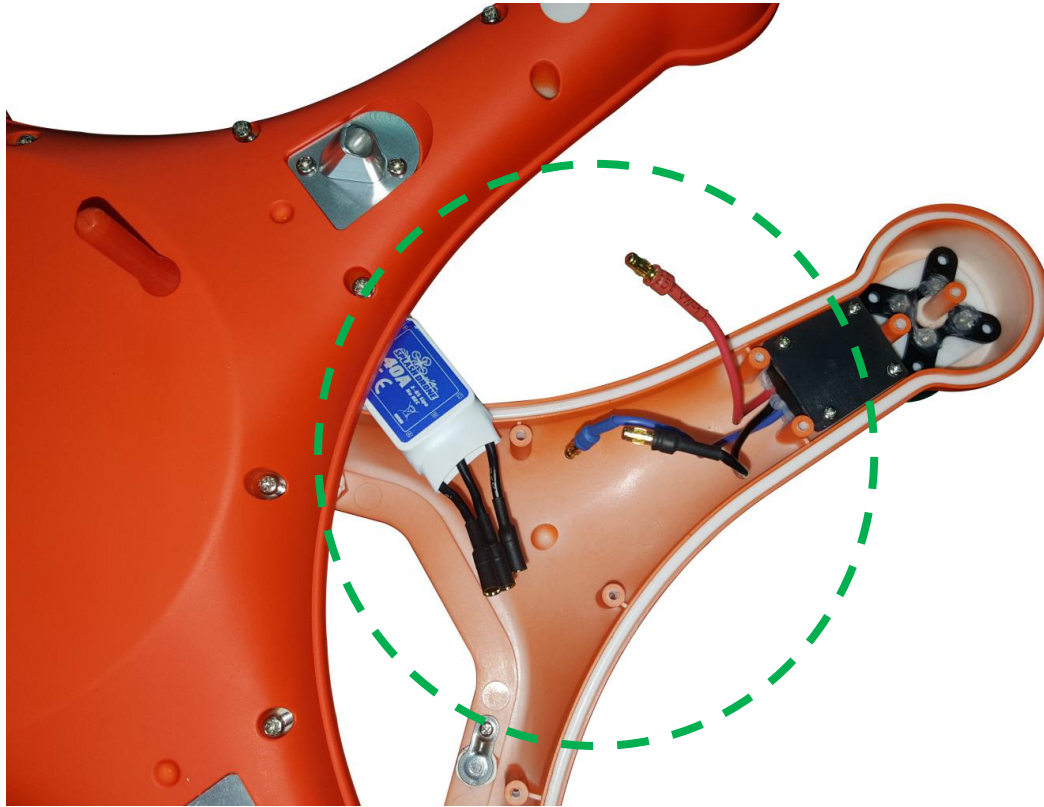

The motor and the electronic speed controller is connected by the connector, just simply pull out to disconnect

Step 5: separate the up case and bottom case

